

HT-S5805 5.1.2-Channel Dolby Atmos® Home Cinema Package



BLACK



HDCP 2.2



192kHz/24bit



Movie Night Will Change Forever

What an awesome way to experience game-changing Dolby Atmos® sound! Everything you need to create a face-melting entertainment system is right here in one simple package, starting with a 100 W/Ch A/V receiver that connects all your media players and sends video to the TV via a single HDMI® cable—from your old analog game consoles to the latest 4K/60 Hz video with 4:4:4 color space and 21:9 cinema aspect. Want full Smart TV capabilities? Plug a media streaming stick into the rearside STRM Box port and enjoy a wealth of audio and video streaming apps. Once you've connected the speaker system—which allows multidimensional Atmos soundtracks to flow above and around you—AccuEQ optimizes the sound to suit the unique shape of your room. We've also included Bluetooth technology so you can hear streamed audio with Onkyo's legendary clarity and dynamism. Unleash tomorrow's entertainment at home today!

HIGHLIGHTS

- Supports Dolby Atmos® up to 5.1.2 Channels (Speakers Included)
- 100 W per Channel
- HDMI® 4 In / 1 Out (4K UltraHD / HDCP 2.2 / 4:4:4)
- Pure Driving Power from Discrete Amp Technology
- Bluetooth Wireless Audio Streaming
- Simple Rear Panel Layout for Easy Connection

HT-R494 7.1-Channel A/V Receiver

- 100 W/Ch (6 Ω, 1 kHz, 1% THD, 1 Channel Driven, IEC); 100 W/Ch (6 Ω, 1 kHz, 1% THD, 1 Channel Driven, JEITA)
- Supports Dolby Atmos® up to 5.1.2 Channels
- 4K/60 Hz-Capable HDMI® Terminals with 4:4:4 Color Space for UltraHD Entertainment (4 In/1 Out)
- Bluetooth Version 2.1 + EDR Capability (Compatible Profile: A2DP v1.2, AVRCP v1.3)
- Advanced Music Optimizer to Improve Compressed Digital Audio Quality (Bluetooth Audio Included)
- Phase-Matching Bass Boost for Deep Bass and Clear Mid-Range
- AccuEQ Room Acoustic Calibration
- WRAT (Wide Range Amplifier Technology)
- H.C.P.S. (High Current Power Supply) Massive High Power Transformer
- Discrete Output Stage Circuitry
- PLL (Phase Locked Loop) Jitter-Cleaning Circuit Technology for S/PDIF Audio

- Dolby® TrueHD and DTS-HD Master Audio™ Decoding
- HDMI Support for 4K/60 Hz, 3D, Audio Return Channel, DeepColor™, x.v.Color™, LipSync, Dolby Atmos®, Dolby® TrueHD, DTS-HD Master Audio™, DVD-Audio, Super Audio CD, Multichannel PCM, and CEC
- TI Burr-Brown 192 kHz/24-bit DAC for All Channels
- Advanced 32-bit DSP Chip
- 4 DSP Modes for Gaming: Rock, Sports, Action, and RPG
- Theater-Dimensional Virtual Surround Function
- CinemaFILTER™
- Direct Mode
- Double Bass Function
- Non-Scaling Configuration
- A-Form Listening Mode Memory
- STRM Box Port (Rear) for Powering Media Streaming Sticks
- 2 Component Video Inputs (Rear)
- 3 Composite Video Inputs (1 Front/2 Rear)
- 3 Digital Audio Inputs (2 Optical and 1 Coaxial)
- 7 Analog Audio Inputs (1 Front/6 Rear)
- Subwoofer Pre-Out
- Headphone Jack
- Crossover Adjustment (40/50/60/70/80/90/100/120/150/180/200 Hz)
- A/V Sync Control (Up to 500 ms in 10 ms Steps at 48 kHz)
- Overlaid On-Screen Display (OSD) via HDMI with Quick Set-Up
- HDMI Passthrough Function
- Tone Control (Bass/Treble) for Front L/R Channels
- 3-Mode Display Dimmer (Normal/Dim/Dimmer)
- 40 FM/AM Random Presets
- RIHD (Remote Interactive Over HDMI) for System Control
- Full-Function RI (Remote Interactive) Remote Control

HTP-588

5.1.2-Channel Home Cinema Speaker System

SKF-594

2-Way Bass Reflex Front Speakers/Full-Range Acoustic-Suspension Height Speakers

- 12 cm Cone Woofer
- 2.5 cm Balanced-Dome Tweeter
- 8 cm Cone (Separately Powered By Height Channel)
- Max. Input Power: 130 W
- Wall-Mounting Capability

SKC-594

2-Way Bass Reflex Center Speaker

- 8 cm Cone Woofer x 2
- 2.5 cm Balanced-Dome Tweeter
- Max. Input Power: 130 W
- Wall-Mounting Capability

SKR-594

Full-Range Acoustic-Suspension Surround Speakers

- 8 cm Cone
- Max. Input Power: 130 W
- Wall-Mounting Capability

SKW-658

Bass Reflex Powered Subwoofer


- 20 cm Cone
- Rated Output Power: 80 W (Minimum Continuous Power, 4 Ω, 100 Hz, 1% IEC)
- Energy-Saving High Power Amplifier
- Down-Firing Design



HT-S5805 5.1.2-Channel Dolby Atmos® Home Cinema Package

Extraordinary Dolby Atmos®

Dolby Atmos transports you into an extraordinary surround sound experience with captivating multidimensional sound objects that fill your room and flow all around you. This 7.1-channel receiver powers a 5.1.2-channel Dolby Atmos speaker setup: 5.1 standard surround configuration plus two height channels inside the front speakers.




Bluetooth Audio Streaming

Stream virtually any audio from your smartphone, tablet, or PC to your home cinema for clear and powerful sound.



AccuEQ Room Acoustic Calibration

AccuEQ measures and corrects speaker distances, output levels, crossover frequencies, and frequency response from one quick and easy listening position to ensure clear and balanced surround-sound.



Top Quality Speaker System

Onkyo knows a thing or two about building great speakers, having almost 70 years' experience in Hi-Fi. The included speaker package features precision drivers housed in solid cabinets—the front speakers also housing up-firing height drivers that unlock the magic of Dolby Atmos.

HDMI® 4 In / 1 Out for UltraHD


All HDMI terminals support the latest TV video displays, and HDCP 2.2 copy protection encoded in content from movie studios, broadcasters, and streaming services, for next-generation UltraHD.



HDCP 2.2

True Power from Discrete Amplifiers

Discrete amps deliver high instantaneous current to increase speaker control for accurate and dynamic audio reproduction. This precise power is the cornerstone of Onkyo's amplification philosophy.

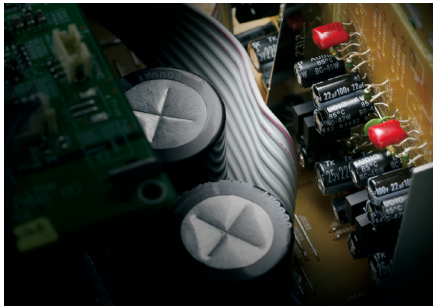

HDMI Video Up-Conversion

Only one wire! Every video signal is converted and sent to your TV through one HDMI cable.

Ready for Streaming Media Devices

The handy STRM Box port supplies power to streaming media players. Keep up with your video subscription services and other programs streamed from the Internet.

SPECIFICATIONS

A/V RECEIVER

Amplifier Section

Power Output	All Channels 100 W/Ch (6 Ω, 1 kHz, 1% THD, 1 Channel Driven, IEC) 100 W/Ch (6 Ω, 1 kHz, 1% THD, 1 Channel Driven, JEITA)
Dynamic Power	160 W (3 Ω, Front) 125 W (4 Ω, Front) 85 W (8 Ω, Front)
THD+N (Total Harmonic Distortion + Noise)	0.08% (20 Hz–20 kHz, Half Power)
Input Sensitivity and Impedance	200 mV/47 kΩ (Line)
Rated RCA Output Level and Impedance	1 Vrms/470 Ω (Subwoofer Pre-Out)
Maximum RCA Output Level and Impedance	2 V/470 Ω (Subwoofer Pre-Out)
Frequency Response	10 Hz–100 kHz/+1 dB, -3 dB (Direct Mode)
Tone Control	±10 dB, 20 Hz (Bass) ±10 dB, 20 kHz (Treble)
Signal-to-Noise Ratio	100 dB (Line, IHF-A)
Speaker Impedance	6 Ω – 16 Ω
Video Section	
Input Sensitivity/Output Level and Impedance	Video 1.0 Vp-p/75 Ω (Component Y) 0.7 Vp-p/75 Ω (Component Pb/Cb, Pr/Cr) 1.0 Vp-p/75 Ω (Composite)

Tuner Section

Tuning Frequency Range	
FM	87.5 MHz–108 MHz 87.5 MHz–107.9 MHz (Taiwan) 522 kHz–1,611 kHz 530 kHz–1,710 kHz 530 kHz–1,710 kHz (Taiwan)
AM	
FM/AM Preset Memory	40 Stations

General

Power Supply	AC 220–240 V~ 50/60 Hz AC 120 V~ 60 Hz (Taiwan Model)
Power Consumption	430 W
No-Sound Power Consumption	55 W
Standby Power Consumption	0.3 W
Dimensions (W x H x D)	435 x 160 x 328 mm
Weight	8.0 kg

SPEAKER SYSTEM

Speaker Type	
Front	2-Way, Bass Reflex
Height	Full-Range, Acoustic-Suspension
Center	2-Way, Bass Reflex
Surround	Full-Range, Acoustic-Suspension
Subwoofer	Bass Reflex, Powered
Drivers	
Front	12 cm Cone Woofer 2.5 cm Balanced-Dome Tweeter
Height	8 cm Cone
Center	8 cm Cone Woofer x 2 2.5 cm Balanced-Dome Tweeter
Surround	8 cm Cone
Subwoofer	20 cm Cone
Frequency Response	
Front	55 Hz–50 kHz
Height	80 Hz–20 kHz
Center	65 Hz–50 kHz
Surround	80 Hz–20 kHz
Subwoofer	27 Hz–150 Hz
Output Sound Pressure Level	
Front	83 dB/W/m
Height	81 dB/W/m
Center	86 dB/W/m
Surround	81 dB/W/m
Max. Input Power	Front/Height/Center/Surround 130 W
Rated Output Power	
Subwoofer	80 W (Minimum Continuous Power, 4 Ω, 100 Hz, 1% IEC)
Nominal Impedance	Front/Height/Center/Surround 6 Ω
Input Sensitivity/Impedance	
Subwoofer	440 mV/20 kΩ

General

Dimensions (W x H x D)	
Front/Height	155 x 467 x 183 mm
Center	409 x 115 x 121 mm
Surround	115 x 230 x 96 mm
Subwoofer	230 x 425 x 410 mm
Weight	
Front/Height	3.6 kg
Center	2.2 kg
Surround	1.0 kg
Subwoofer	7.7 kg

CARTON

Dimensions (W x H x D)	772 x 855 x 514 mm
Weight	34 kg


Supplied Accessories

- Indoor FM antenna • AM loop antenna • Speaker setup microphone
- Color-coded speaker cables • Subwoofer cable • Instruction manual
- Remote controller • AA (R6) batteries x 2

HTR494



Front View

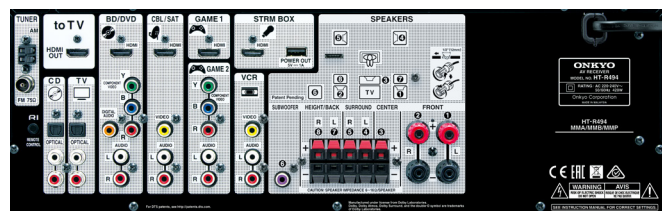

Rear View

Text on receiver may vary with region.

Due to a policy of continuous product improvement, Onkyo reserves the right to change specifications and appearance without notice. Manufactured under license from Dolby Laboratories. Dolby, Atmos, Pro Logic, and the double-D symbol are trademarks of Dolby Laboratories. For DTS patents, see <http://patents.dts.com>. Manufactured under license from DTS Licensing Limited. DTS, DTS-HD, the Symbol & DTS and the Symbol together are registered trademarks, and DTS-HD Master Audio is a trademark of DTS, Inc. © DTS, Inc. All Rights Reserved. HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. WRAT, Music Optimizer, CinemaFILTER, Theater-Dimensional, and AccuEQ are trademarks of Onkyo Corporation. All other trademarks and registered trademarks are the property of their respective holders.

ONKYO <http://www.onkyo.com/>

Copyright © 2015 Onkyo Corporation. All rights reserved.

NPR No. 15N19 05/15